


HG 30/40127 D: KDG zertifiziert D4.4

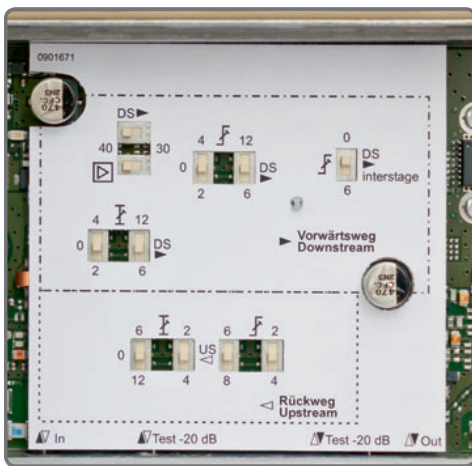

| Typ / Type                            | HG 30/40127 D                      | HG 30/40127                | HG 30115                   |
|---------------------------------------|------------------------------------|----------------------------|----------------------------|
| Artikel-Nr. / Article no.             | 1452500                            | 1452490                    | 1452487                    |
| Frequenzbereich / Frequency range     | 85–1006 MHz                        |                            |                            |
| Verstärkung / Gain                    | schaltbar/switchable 30/40 dB30 dB |                            |                            |
| Pegelsteller / Attenuator             | 0–16 dB                            |                            | 0–20 dB                    |
| Entzerrer / Equalizer                 | 0–16 dB / Interstage 0 oder 6 dB   |                            | 0–20 dB                    |
| Rauschmaß / Noise figure              | $\leq 6,5$ dB                      |                            | 4,5 dB                     |
| Messbuchsen / Test points             | -20 dB                             |                            |                            |
| <b>Ausgangspegel / Output level</b>   |                                    |                            |                            |
| Cenelec 42 CTB / CSO flat             | 111 dB $\mu$ V                     |                            | 101 dB $\mu$ V             |
| IMA3 60 dB                            | 127 dB $\mu$ V                     |                            | 115 dB $\mu$ V             |
| <b>Rückkanal / return path</b>        |                                    |                            |                            |
| Rückkanalfrequenz / Return path freq. | 4–65 MHz                           |                            | 4–65 MHz                   |
| Rückkanalverstärkung/Gain return path | 30 dB                              |                            | 27 dB                      |
| Pegelsteller / Attenuator             | 0–16 dB                            |                            | 0-20 dB                    |
| Entzerrer / Equalizer                 | 0–12 dB                            |                            |                            |
| Ausgangspegel / Output level max.     | IMA3 60 dB: 117 dB $\mu$ V         | IMA3 60 dB: 117 dB $\mu$ V | IMA3 60 dB: 117 dB $\mu$ V |
| Spannungsversorgung/Operating voltage | 180–255 V~                         |                            | 180–255 V~                 |
| Leistungsaufnahme / Power consumption | 13,5 W                             | 12 W                       | 6 W                        |
| Maße (BxHxT) / Dimensions (WxHxD)     | 242 x 105 x 60 mm                  |                            |                            |
| Klassifizierung                       | <b>KDG D4.4</b>                    | <b>KDG C4.4</b>            | <b>C 3.2</b>               |